

**delair®**

**delair (india) pvt. ltd.**

Plot No. 21C, Sector 18, Gurugram-122015

Ph:91-124-4091111 FAX:91-124-4091100

E-Mail: delair@pahwa.com

**TECHNICAL SPECIFICATION**


BULLETIN : DAI:DD-P-1100.3  
 EFFECTIVE : JUNE 26, 2018  
 SUPERCEDES : DAI:DC-P-1100.2  
 DATED : APRIL 01, 2016

**HEATLESS DRYER  
 DD DELPET™ SERIES**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> <li>Wide range of 4 Standard models with capacities from 34.7 m3/hr. To 104 m3/hr. higher capacities are available on request</li> <li>Atmospheric dew point achievable (-) 40°C and below</li> <li>Electronic controls/solid state timers for automatic and reliable operation</li> <li>Low power consumption</li> <li>Equipped with muffler on purge air outlet to reduce noise level</li> <li>Specially graded desiccant <i>Delsorb™</i> 10 for optimum performance and long life</li> </ul>	<ul style="list-style-type: none"> <li>Humidity indicator</li> <li>Filters and/or total dryer bypass line with valves.</li> <li>Special delair filters for removal of water, oil mists, oil vapour and dust particles with electronically operated drain valves</li> <li>Explosion proof controls for offshore application</li> <li>Construction according to various codes</li> </ul>	<ul style="list-style-type: none"> <li>Working Pressure : 25 to 40 kg/cm2(g)</li> <li>Air inlet temperature : 40°C</li> <li>Ambient temperature : 40°C</li> </ul> <p>Note : For other working conditions please contact factory.</p>

**SPECIFICATION SHEET**

MODEL No.	CAPACITY IN M3/HR. PRESSURE IN KG/CM2(G)				CONNECTION (IN INCHES)	DIMENSIONS (IN MM)			WEIGHT (IN KG)
	25	30	35	40		L	W	H~	
DD-P-55	34.7	41.33	48	54.7	½" FLANGE	730	850	1500	200
DD-P-75	46.30	55.2	64.1	73	½" FLANGE	730	850	1700	220
DD-P-110	69.44	82.8	96.14	109.5	½" FLANGE	760	850	1700	270
DD-P-170	104	124	144	164	½" FLANGE	800	850	1700	320

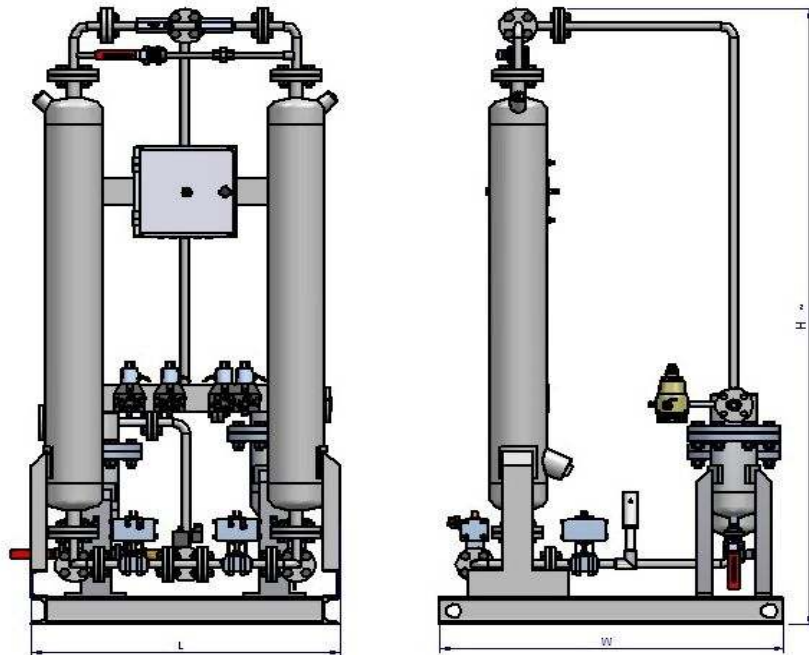

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE